


日期/Date	档案员 Filing Clerk	线径/Wire Gauge		d	剥线长度 Stripping Length	重量/Weight g
		mm ²	AWG			
CSSM-0.25	1010141100101	0.09-0.25	28-24	0.64	5	0.19
CSSM-0.33	1010141100201	0.25-0.33	26-22	0.9	5	0.18
CSSM-0.52	1010141100501	0.33-0.52	22-20	1.12	5	0.17

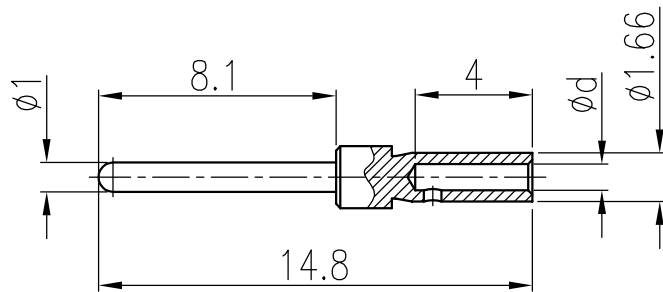


技术参数:

- 材料: 铜合金
- 表面处理: 镀银
- 额定电流: 5A
- 接触电阻: $\leq 3m\Omega$
- 线径范围: 0.09-0.52mm²(28-20 AWG)
- 可插拔次数: ≥ 500

Technical specification:

- Material: copper alloy
- Surface: silver plated
- Rated current: 5A
- Contact resistance: $\leq 3m\Omega$
- Wire gauge: 0.09-0.52mm²(28-20 AWG)
- Mating cycles: ≥ 500



						表面处理 Finish		-		图号 Drawing No.		-	
						材料 Material		-		产品代号 Part Code		CSSM-XX	
标记 Mark		处数 Number		变更描述/Description		签名 Signature		日期 Date		产品料号 Part No.		-	
姓名/Name		日期/Date		姓名/Name		日期/Date		比例 Scale		版本 REV.		重量 Weight	
BQ LUO		18.10.2010		标准化 Stand.		-		4:1		V1.0		数量 Qty.	
审核 Checked		P RAO		18.10.2010								产品名称 Part Name	
工艺 Process		-		批准 Approved		YY LIN		18.10.2010		All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	